


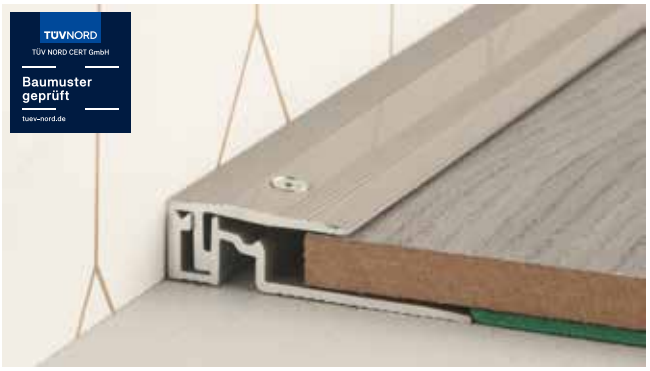

PS 400 Abschlussprofil Nr. 407, 28 x 12 mm

- Aluminium.
- Für Belagstärken 7 - 17,5 mm.
- Ideal für Wandanschlüsse und den Abschluss an Balkontüren.
- Inklusive Basisprofil.
- Mit breitem Schraubschenkel.

TÜV Zertifikat-Nr. 44 780 14206202
Europa-Patent Nr. 1442687

Oberprofil:	Aluminium
Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)
Vorbehandlung:	E6 (DIN EN 17 611)
Schichtdicke Eloxal:	Klasse 15 (DIN EN 17 611)

Basisprofil:	Aluminium
Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)

Lieferumfang: Aluminium-Oberprofil, Aluminium-Basisprofil, Befestigungsmaterial

Geeignet für: Laminat / Multilayer, Fertigparkett
Montageart: Schrauben

Das PS 400 Schraubprofilsystem ist konstruiert für die Verarbeitung von Laminat, mehrschichtigen modularen Belägen sowie Parkett.
PS 400 Profile überzeugen durch ihre zeitsparende und einfache Verarbeitung. Zunächst wird das Basisprofil auf dem Untergrund verschraubt und der Bodenbelag verlegt. Dabei ist eine ausreichende Dehnungsfuge zu berücksichtigen.
Der Führungssteg des Oberprofils wird vom Schwenkkanal des Basisprofils aufgenommen. Die Oberprofile passen sich stufenlos dem Bodenbelag an. Auch bei starken Niveauunterschieden schließen sie automatisch dicht an beiden Seiten ab.
Mit den beigefügten Selbstbohrschrauben werden die Oberprofile im Basisprofil befestigt. Der Rundumkontakt der Schraube garantiert einen optimalen Kraftschluss; auch nach mehrjähriger Druck- und Zugbelastung entsteht kein Spiel.
Aufgrund der starken, dauerhaften Verbindung ist das Profilsystem für höchste Belastungen geeignet.

PS 400 edge section no. 407, 28 x 12 mm

- Aluminium.
- For covering thicknesses 7 - 17.5 mm.
- Ideal for wall connections and the joints within balcony doors.
- Including base section.
- With long base.

TÜV certification no. 44 780 14206202
European patent no. 1442687

Upper section:	Aluminium
Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)
Pre-treatment:	E6 (DIN EN 17 611)
Thickness of anodised layer:	Class 15 (DIN EN 17 611)

Base section:	Aluminium
Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)

Included: Aluminum top section, aluminium base section, fastening material

Suitable for: Laminate / multilayer, Finished parquet
Installation: screwing

PS 400 screw-in profile system is designed for laying laminate floor, multi-layered modular Floor coverings as well as parquet.
PS 400 profiles are distinguished by their time-saving and simple laying. First of all, the base profile is screwed onto the subfloor and the floor covering is laid. When doing so, make sure the expansion joint is large enough.
The upper profiles adapt smoothly to the floor covering. Even if there are differences in floor heights, they automatically seal off tightly on both sides.
The top profiles are secured to the base profiles with the enclosed self-tapping screws. The allround contact of the screw guarantees optimal frictional connection; there is zero-play even after many years of pressure and tensile load.
Due to the strong, permanent connection, the profile system is suitable for maximum loads.