

Übergangprofil Nr. 115, 40 mm

Übergangprofile schaffen Übergänge zwischen nahezu beliebigen, gleichhohen Bodenbelägen.


Die in verschiedensten Breiten, Formen, Materialien und Farben erhältlichen Profile lassen sich schnell und unkompliziert verlegen.

- Aluminium.
- Selbstklebend.

Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)
Vorbehandlung:	E6 (DIN EN 17 611)
Schichtdicke Eloxal:	Klasse 15 (DIN EN 17 611)

Klebstoff	
Schmelzhaftklebstoff (synthetische Kautschukbasis)	
Viskosität:	10.000 +/- 3.000 mPa.s (170°C)
(Brookfield RVT DV-II, Sp 27 ASTM D 3236)	
FDA Status:	gemäß § 175.105 Adhesives
Transportschutz:	abgedeckt mit Silikonpapier

Geeignet für:	Elastische Bodenbeläge, Textile Bodenbeläge
Montageart:	Kleben
Längen:	270 / 100 cm
Farbauswahl:	gold, silber, Edelstahl matt

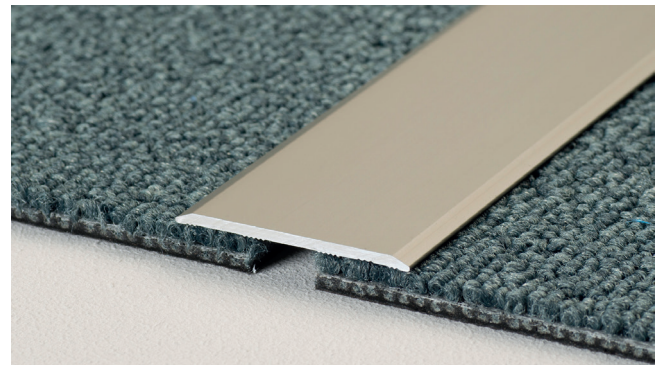

Connection section no. 115, 40 mm

Connection sections create transitions between almost any level of flooring.

The profiles are available in a wide range of shapes, materials and colors and can be laid quickly and easily.

- Aluminium.
- Auto-adhesive.

Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)
Pre-treatment:	E6 (DIN EN 17 611)
Thickness of anodised layer:	Class 15 (DIN EN 17 611)

Adhesive	
hotmelt adhesive (synthetic rubber-based)	
Viscosity:	10.000 +/- 3.000 mPa.s (170°C)
(Brookfield RVT DV-II, Sp 27 ASTM D 3236)	
FDA state:	acc. to § 175.105 Adhesives
Protection:	covered with silicone paper

Suitable for:	elastic floor coverings, textile floor coverings
Installation:	gluing
Lengths:	270 / 100 cm
Colours:	gold, silver, stainless steel matt